

Optics in 2006

PANEL CHAIR:

Bob D. Guenther

Duke University

GUEST EDITORS:

Janice Hudgings

Mount Holyoke College

Bob Jopson

Bell Labs, Lucent Technologies

R. John Koschel

Lambda Research Corp.

This special issue highlights the most exciting research to emerge in the preceding 12 months in the fast-paced world of optics. The areas covered in 2006 include array detectors, Bloch oscillations, coherent imaging, diffractive optics, imaging, metamaterials, nonlinear optics, optical beams, opto-mechanics, polarization, Raman spectroscopy, soft X-rays and ultrafast science.

This year's issue comprises 30 summaries that represent the work of 185 authors. There were 74 submissions from 374 authors representing 16 countries. Submissions were judged on the basis of the following criteria:

- The accomplishments described must have been published in a refereed journal in the year prior to publication in OPN.
- The work should be illustrated in a clear, concise manner that is readily accessible to the at-large optics community.
- The authors should describe the topical area as a whole and then detail the importance of their work in that context.

OPN and OSA would like to thank all the researchers from around the world who submitted summaries to "Optics in 2006," as well as our panel chair and guest editors.

Optically Induced PCF-Like Structures

Xiaosheng Wang, Igor Makasyuk, Jianke Yang and Zhigang Chen

One of the most fascinating features of photonic band-gap (PBG) structures is that they provide a fundamentally different way of waveguiding by defects in otherwise uniformly periodic structures, as opposed to guidance by total internal reflection (TIR).¹ Such band-gap guidance has been demonstrated in two-dimensional (2D) arrays of dielectric cylinders with an isolated defect for microwaves, and in holey-core photonic crystal fibers (PCF) or in all-solid PCF with a lower-index core for optical waves, where the PBG refers to time-domain frequency modes. In fact, laser emission based on photonic defect modes has been realized for a wide range of spectra.

On the other hand, the PBG of spatial frequency modes (propagation constant vs. transverse wave vector) in waveguide lattices² represents another possibility for unconventional guidance of light, especially in periodic waveguides with structured defects. For instance, in optically induced lattices containing a

negative defect, a probe beam tends to diffuse away from the defect site where the induced index is lower than that in neighboring sites. However, within the PBG, the probe beam can be localized by defects, forming an evanescent defect mode.³ In a number of recent experiments, we have demonstrated novel spatial confinement of light in optically induced PCF-like structures, including those with a negative defect embedded in 1D stripe waveguide lattices, 2D square lattices, and 2D ring lattices akin to PBG fibers.^{4,5} In these settings, the guidance of light is distinctively different from traditional guidance by TIR or soliton-induced nonlinear self-guidance.

Typical experimental results are summarized in the figure. The refractive index structures (lattices) with a single-site negative defect are optically induced in a nonlinear photorefractive crystal by spatial modulation of an optical beam with an amplitude mask. Such structures (in the x - y plane) remain nearly invariant

after 10 to 20 mm of propagation through the crystal (along the z -direction) under appropriate conditions.

The lattice potential or the index change is controlled by parameters such as the lattice beam intensity, polarization, coherence, as well as the bias field across the crystal. The lattice spacing is typically between 20 and 30 μm . To test the "guiding" property of the defect, a focused probe beam of about 16 μm FWHM is aimed into the defect site or the central low-index core, propagating collinearly with the lattice beam. The intensity or the wavelength of the probe beam is so chosen such that it does not experience any nonlinear self-action.


Without the lattice, the probe beam diffracts dramatically. However, with the lattice, it exhibits good confinement by the defect channel. Such guidance is not attributed to TIR because the defect forms an anti-guide with self-focusing nonlinearity (top two rows) while the center of the Bessel-like lattice also forms an anti-guide with self-defocusing nonlinearity (bottom row). Instead, this arises from the formation of photonic defect modes, or the anti-resonance effect in the ring PCF-like waveguides.^{4,5} Our results bring about the possibility to control light in a new type of reconfigurable PBG structure. \blacktriangle

This work was supported by NSF, AFOSR, PRF and NSFC.

[X. Wang, I. Makasyuk and Z. Chen are with the department of physics and astronomy, San Francisco State University, San Francisco, Calif. (Chen is also affiliated with the Key Laboratory for Weak-Light Nonlinear Photonics Materials, Ministry of Education and TEDA Applied Physical School at Nankai University in Tianjin, China.) J. Yang is with the department of mathematics and statistics at the University of Vermont and the Zhou Pei-Yuan Center for Applied Mathematics, Tsinghua University, Beijing, China.]

References

1. P. Russell. *Science* **299**, 358 (2003).
2. D.N. Christodoulides et al. *Nature* **424**, 817 (2003).
3. F. Fedele et al. *Opt. Lett.* **30**, 1506 (2005); J. Yang and Z. Chen, *Phys. Rev. E* **73**, 026609 (2006).
4. I. Makasyuk et al. *Phys. Rev. Lett.* **96**, 223903 (2006).
5. X. Wang et al. *Opt. Lett.* **31**, 1887 (2006); *Opt. Express* **14**, 7362 (2006).

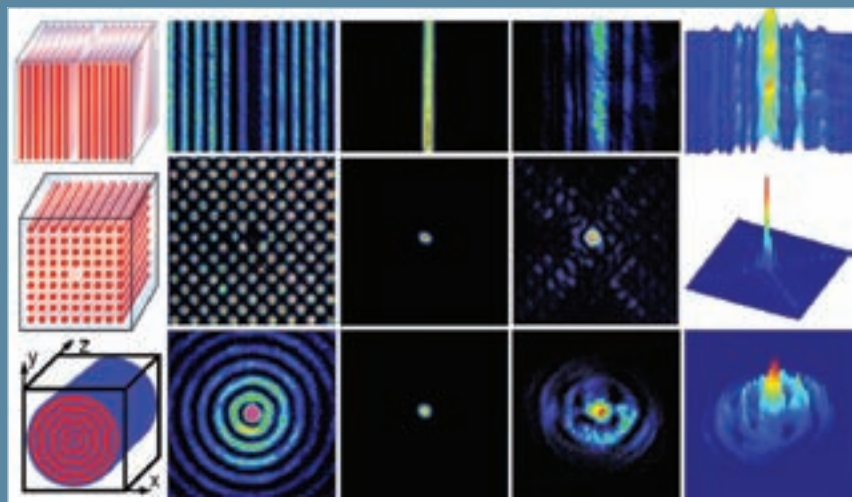

Guiding light in optically induced PCF-like structures. The first two rows are 1D and 2D lattices with a single-site negative defect induced with self-focusing nonlinearity. The bottom row shows the ring lattices with a central low-index core induced with self-defocusing nonlinearity. From left to right, shown are schematic illustration of induced lattice structures (red indicates high index), experimentally created lattice patterns, the probe beam at input, and its 2D and 3D intensity patterns exiting the defect or low-index channel, respectively.